





BAUER

FOR A GREEN WORLD

IDENTIFICATION OF TEE'S AND 'Y' PIECES



MALE /FEMALE/MALE
M/F/M



MALE/MALE/FEMALE
M/M/F




MALE/FEMALE/FEMALE
M/F/F



MALE/MALE/FEMALE
M/M/F



FEMALE/FEMALE/MALE
F/F/M






BAUER


FOR A GREEN WORLD

EASY STEP TO IDENTIFY SIZES

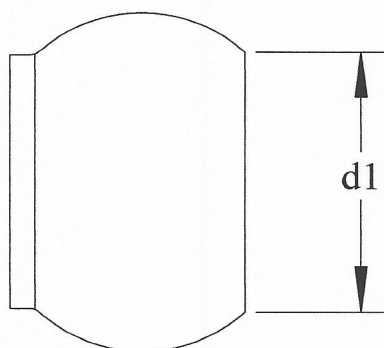

MEASURE THE OPEN
END THROAT OF
THE MALE AS
ILLUSTRATED.

MEASURE THE OVERALL
OUTSIDE DIAMETRE
OF THE FEMALE AS
ILLUSTRATED.

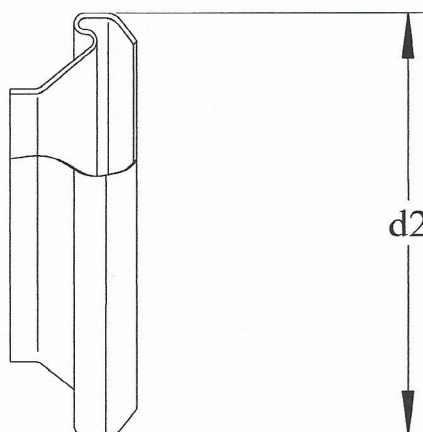


SEE CHARTS FOR S1 AND S3 WELD ENDS




BAUER

FOR A GREEN WORLD

S1 MALE WELD END

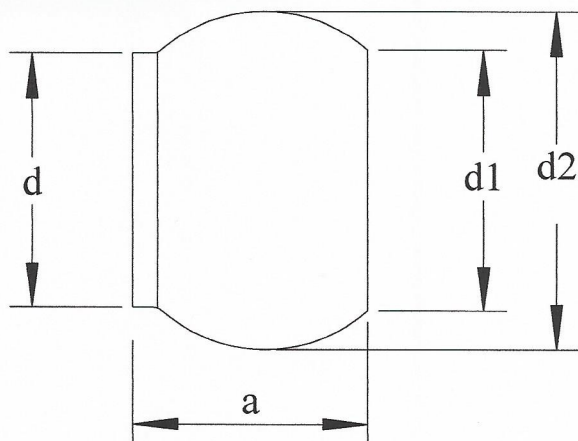

Dimension						Weight	PN	HK	HK	HK
HK	Inch	a	d	d1	d2	kg	bar	black	galvanised	Stainless
50	2	54	49.5	52	70	0.13	20	42928	52944	52903
76	3	73.5	76	78	97.5	0.26	12	42926	52945	63076
89	3.1/2	87	89	90	119.5	0.37	20	42930		52904
108	4.1/4	104.5	108	111	144	0.69	12	42932	52947	52905
133	5.1/4	96.5	133	135	159.5	0.81	12	42935		
159	6.1/4	119	159	154	179.5	1.29	12	42934		52906
194	7.5/8	127	194	200	230	1.90	12	42990		52931

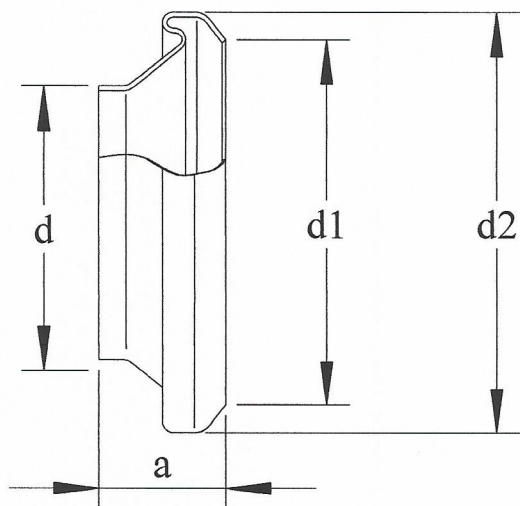


S3 FEMALE WELD END

Dimension						Weight	PN	HK	HK	HK
HK	Inch	a	d	d1	d2	kg	bar	black	galvanised	Stainless
50	2	32	49.5	70.5	83	0.12	20	42927	52950	52907
76	3	36	76	100.5	116.5	0.25	12	42925		
89	3.1/2	54	89	120	137	0.39	20	42929		52908
108	4.1/4	58	108	145	167	0.64	12	42931	52953	52909
133	5.1/4	60	133	161	191	0.92	12	42936		
159	6.1/4	50	159	180.5	212	1.16	12	42933	52955	52910
194	7.5/8	76	194	234	267	2.32	12	42989		52932




BAUER

FOR A GREEN WORLD

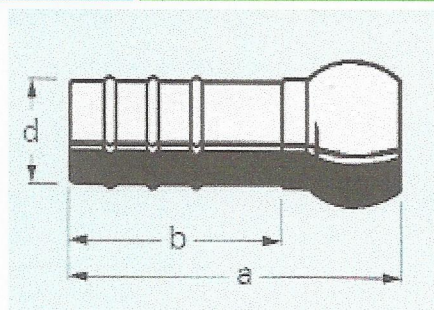

Geniune BAUER HK Hose Couping S77

DIMENSION					Weight
HK	INCH	a	b	d	(kg)
50	2	200	145	50	0.38
76	3	229	145	74.6	0.82
89	3.1/2	242	155	74.6	1.20
108	4.1/4 (4)	313	208	100	1.70
133	5.1/2 (5)	305	208	125	2.25
159	6.1/4 (6)	350	232	150	3.35
194	7.5/8 (8)	397	270	200	3.90

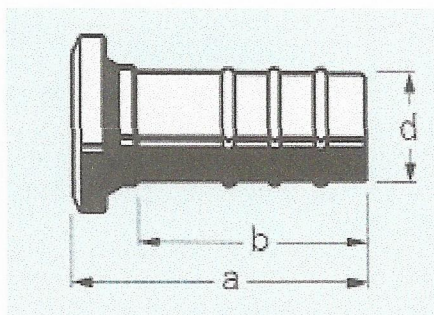

Geniune BAUER HK Hose Couping S78


DIMENSION					Weight
HK	INCH	a	b	d	(kg)
50	2	179	145	50	0.40
76	3	194	145	74.6	0.80
89	3.1/2	209	155	74.6	1.68
108	4.1/4 (4)	266	208	100	1.70
133	5.1/2 (5)	268	208	125	2.40
159	6.1/4 (6)	282	232	150	3.30
194	7.5/8 (8)	346	270	200	4.30




BAUER

FOR A GREEN WORLD

S2 HK Lever Closure Ring

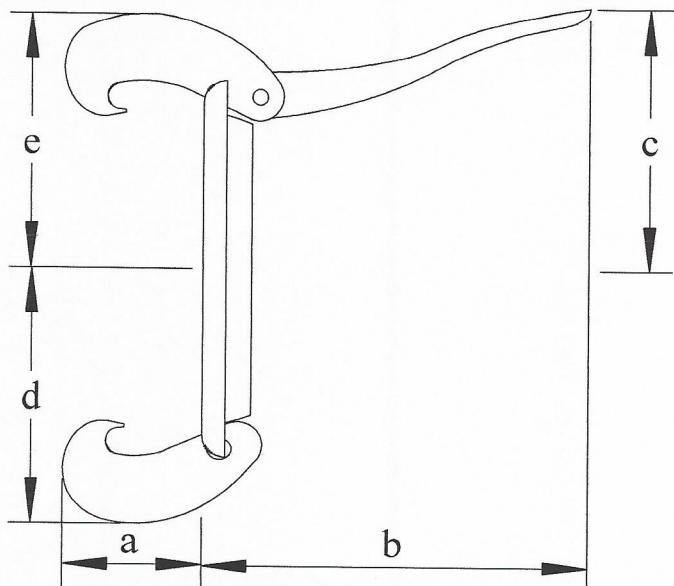

Dimension							Wt.	PN	HK	HK
HK	Inch	a	b	c	d	e	Kg	bar	black	galvanise
50	2	38	120	80	65	63	0.42	20	52930	42902
76	3	62	170	85	90	95	1.08	12	52902	42922
89	3.1/2	62	175	116	101	107	1.40	20	42998	42906
108	4.1/4	65	210	114	115	123	1.80	12	42999	42910
133	5.1/4	80	230	141	130	137	3.05	12	52963	42914
159	6.1/4	90	170	157	152	150	4.05	12	52901	42918
194	7.5/8	100	160	186	180	177	6.10	12	52928	42975

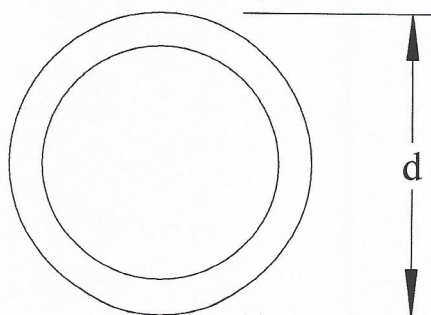

S4, S5 RUBBER SEALING RINGS

Dimension							Wt.	PN	bar	HK	black
HK	Inch	a	b	c	d	e	Kg				
50	2	38	120	80	65	63	0.42	20		52930	
76	3	62	170	85	90	95	1.08	12		52902	
89	3.1/2	62	175	116	101	107	1.40	20		42998	
108	4.1/4	65	210	114	115	123	1.80	12		42999	
133	5.1/4	80	230	141	130	137	3.05	12		52963	
159	6.1/4	90	170	157	152	150	4.05	12		52901	
194	7.5/8	100	160	186	180	177	6.10	12		52928	

**BAUER***FOR A GREEN WORLD*

data sheet rubber ring S4

Designation	<i>NR</i>
Colour	<i>black</i>
Shape	<i>O-ring</i>
Hardness	<i>Shore A 52 +3/-2</i>
Density	<i>1,29 g / cm³</i>
Tensile strength	<i>5,7 N / mm²</i>
Elongation at break	<i>470 %</i>
Temperature range	<i>-20° C to 80° C</i>

**BAUER***FOR A GREEN WORLD*

data sheet rubber ring S5 / oil-resistant

Designation	<i>NBR 3445</i>
Colour	<i>red</i>
Shape	<i>O-ring</i>
Hardness	<i>Shore A 53 +/-3</i>
Density	<i>1,3 g / cm³</i>
Tensile strength	<i>10 N / mm²</i>
Elongation at break	<i>730 %</i>
Temperature range	<i>-20° C to 80° C</i>